




**MEEK MIRRORS, LLC**  
PO Box 11200  
Fort Smith, Arkansas 72917-1200  
800-643-2533 Fax 479-646-6231  
[www.meekmirrors.com](http://www.meekmirrors.com)

**Architectural  
Specification**

GRAB BAR	DATE June 2017	MODEL M8000 SERIES	SHEET NO. 12-01
----------	-------------------	--------------------------	--------------------

**MODEL M8000 SERIES GRAB BAR**

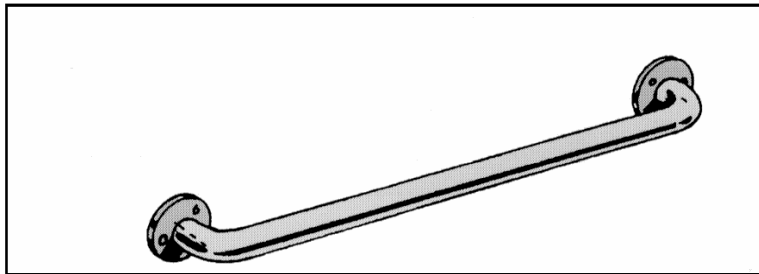

**MATERIALS:** Stainless steel Type 304, 18 gauge tubing with No.4 satin finish. Mounting back plate is 12 gauge, type 304 stainless steel, 3”(76 mm) in diameter and heliarc welded to bar. Snap flange cover escutcheon is 22 gauge, Type 304 stainless steel polished with No.4 satin finish. Escutcheon cover is for concealing screws, esthetics only. All flanges and center post are heliarc welded to tubing forming an integral part of the bar. The grab bar is available in 1”, 1-1/4” and 1-1/2” diameter.

**FEATURES:** The snap-lock flange is a direct to wall design that is an improvement in strength, cost and ease of installation over set screw fastening systems. Meek recommends 18 gauge tubing for this grab bar which has been tested to withstand pulls in excess of 1300 pounds when installed properly.

**INSTALLATION:** Surface mount base flange to wall with screws provided by the manufacturer. In wall backing is recommended, consult local codes to assure compliance. Install cover over base plate by matching dimples and snapping into place with a rubber-tipped hammer.

**GUARANTEE:** Meek Mirrors gives a one year guarantee on all products against defects in workmanship and material.

**SPECIFICATION:** Product shall be Model M8000 as distributed by Meek Mirrors - Fort Smith, Arkansas. Above data is applicable to productions as of the date of this technical data sheet. The manufacturer reserves the right to make changes in design without formal notice.